




I							
III II							
Operating temperature range[°C]							
Max. operation altitude[m]							
Storage temperature[°C]							
Typical noise emission[dBA]							
Self-consumption at night [W]							()
Warranty[Years]							
() [mm]							
Weight[KG]							

Nominal Battery Pack Energy[KWh]			
Available Battery Pack Energy[KWh]			
Nominal Battery Cell Capacity[Ah]			
Nominal Voltage[V]			
Nominal Charging Current[A]			
Nominal Discharging Current[A]			
Warranty[Years]			
Dimension[mm]			
Weight[Kg]			


Nominal Battery Pack Energy[KWh]				
Available Battery Pack Energy[KWh]				
Nominal Battery Cell Capacity[Ah]				
Nominal Voltage[V]				
Nominal Charging Current[A]				
Nominal Discharging Current[A]				
Warranty[Years]				
Dimension[mm]	()	()	()	()
Weight[Kg]				



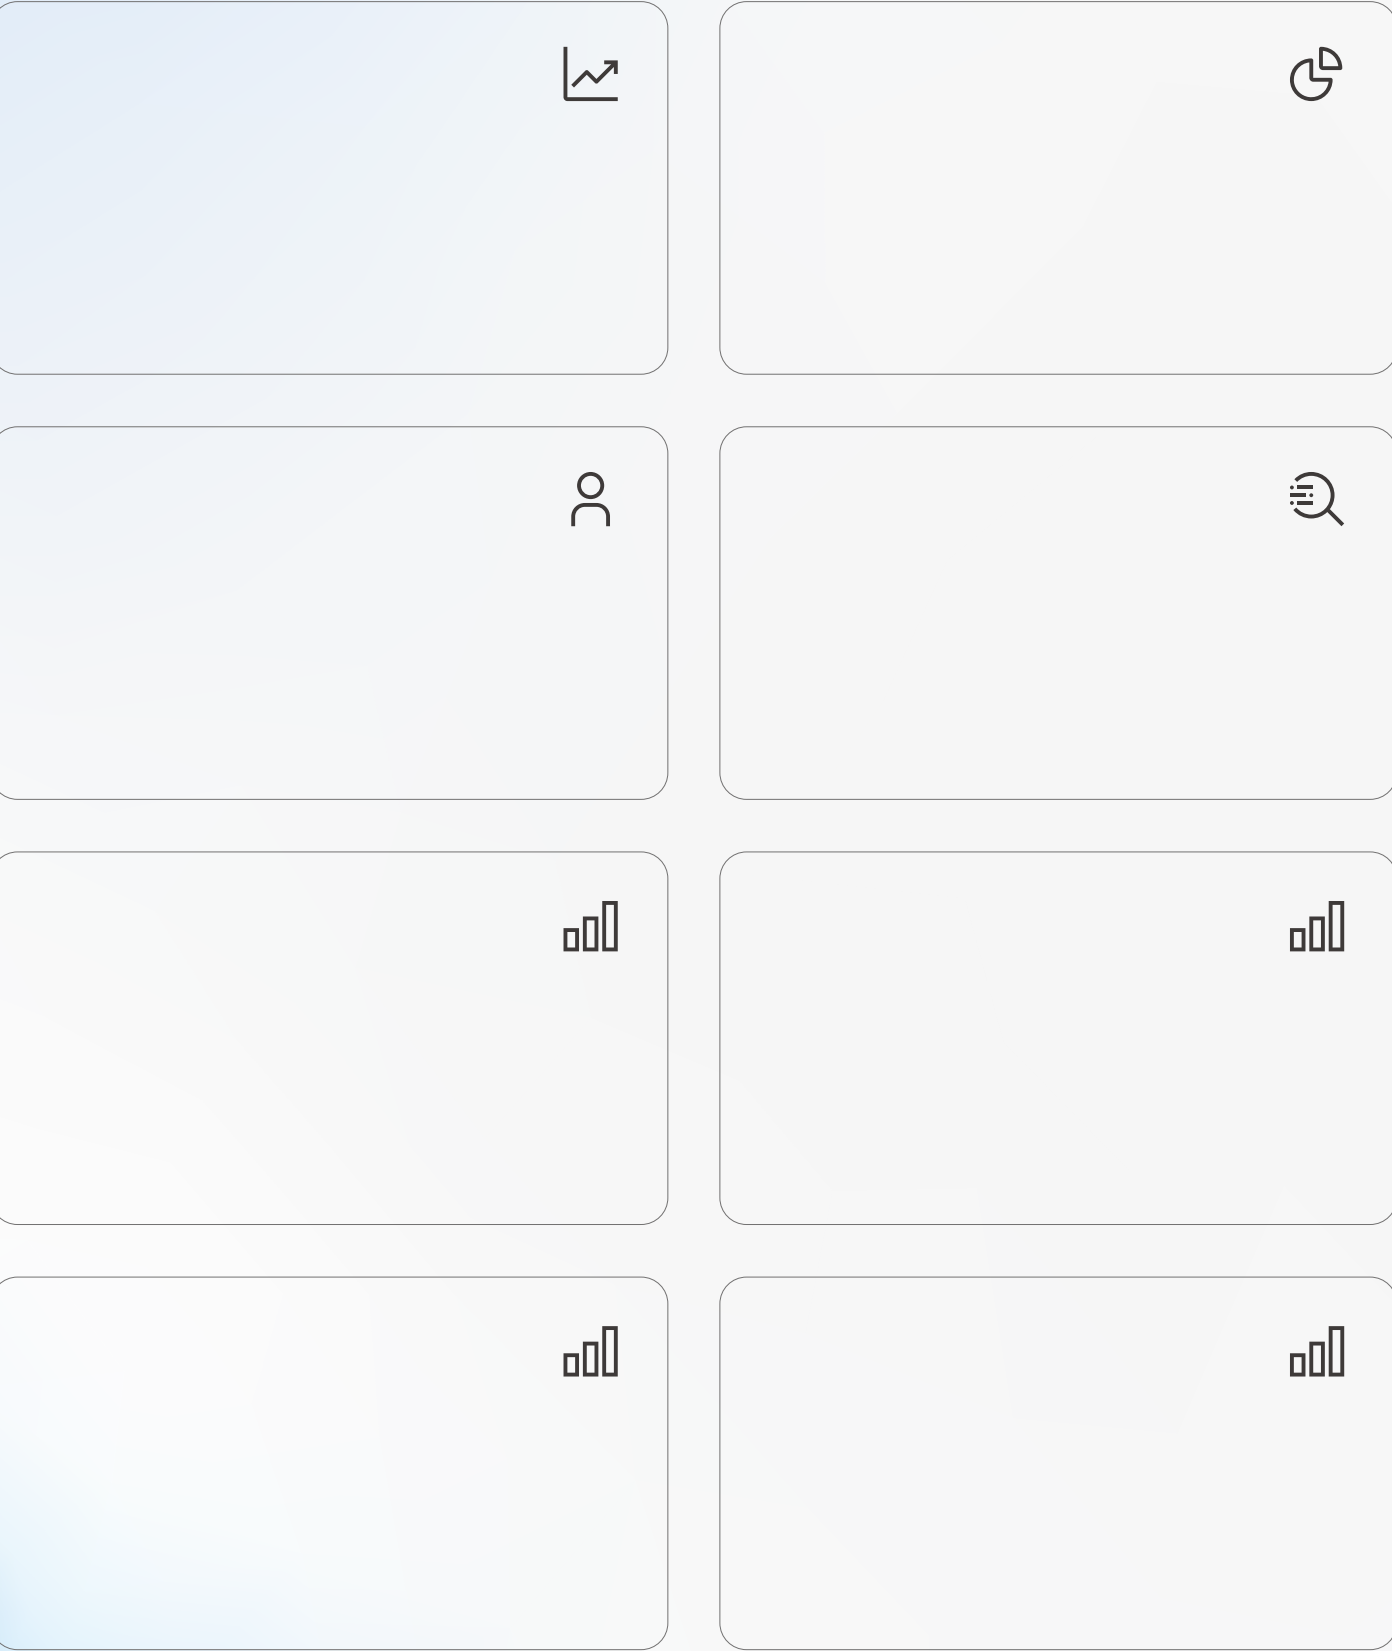

ODM VALUE CHAIN

A REPEATABLE PATH FOR EXCELLENCE IN QUALITY DELIVERY

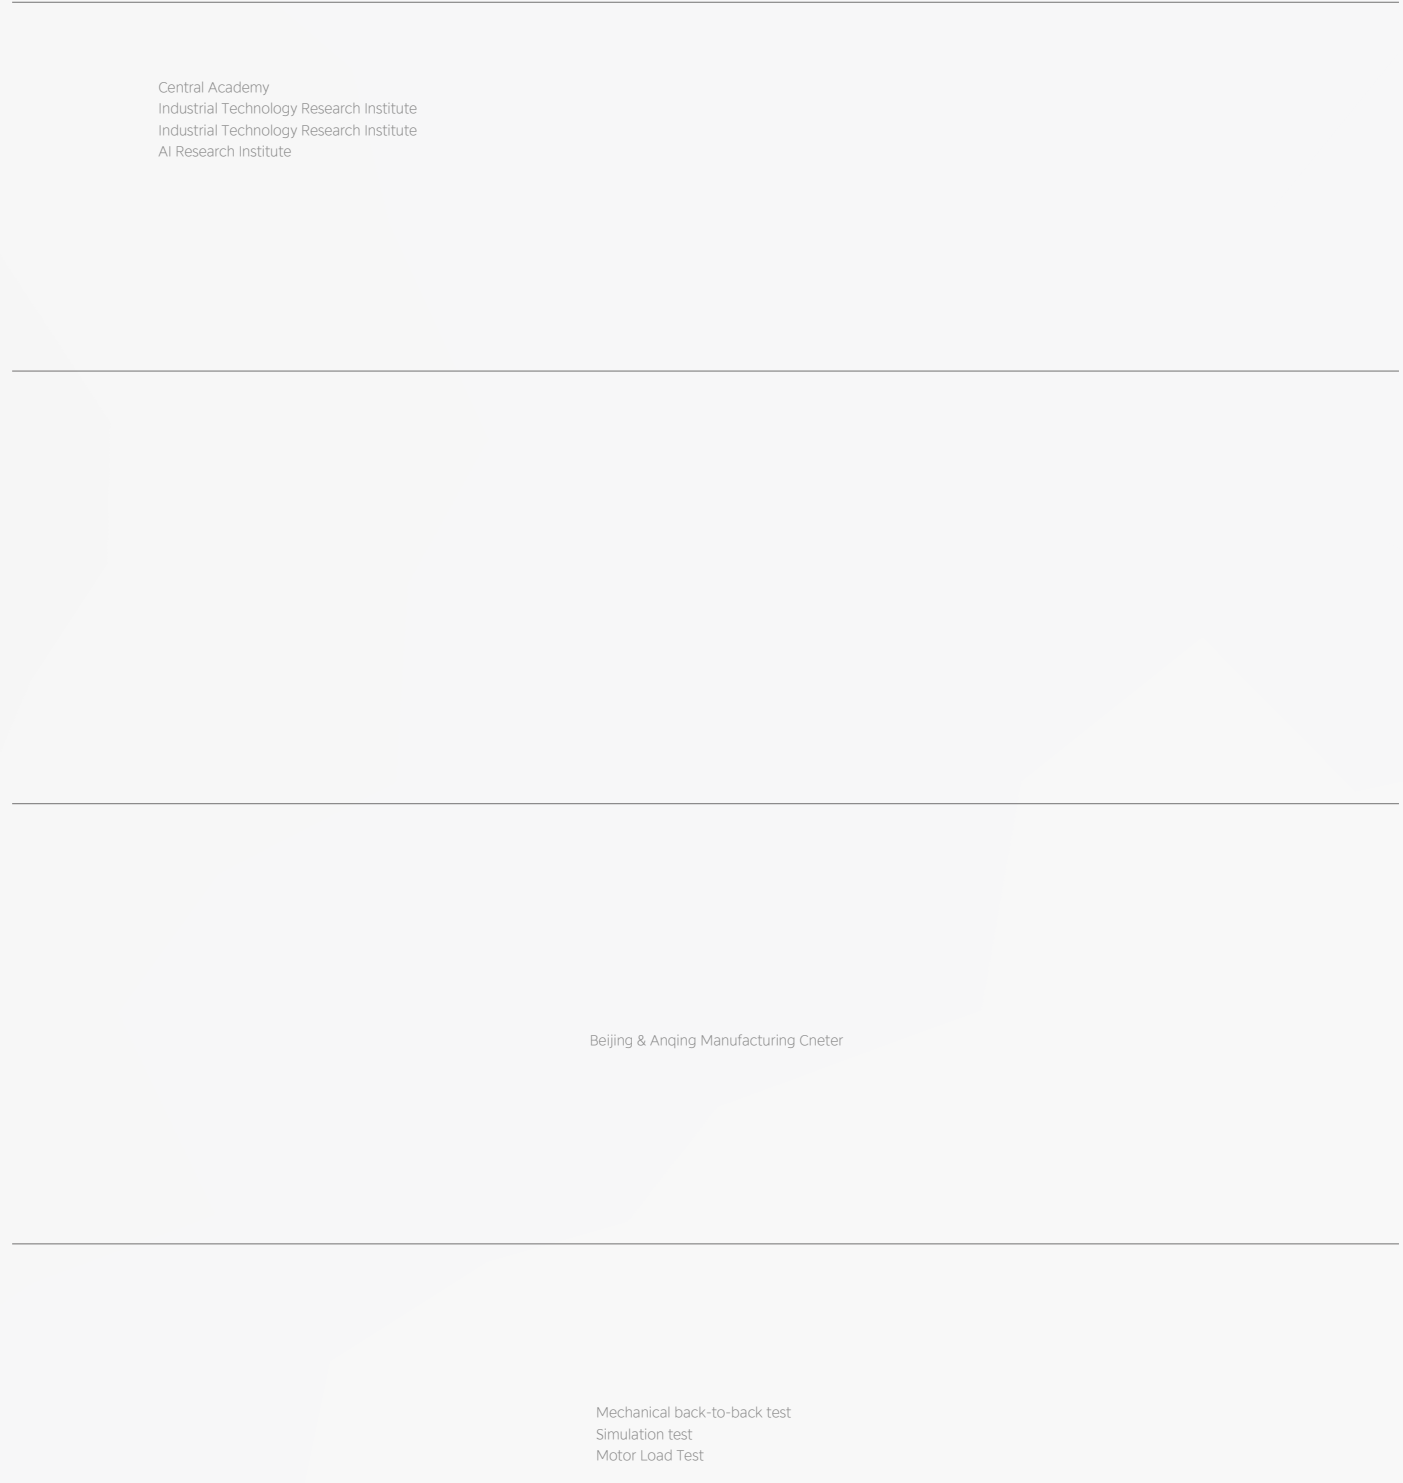

SUPERIOR PERFORMANCE

-
-
-
-

INTEGRATED CONTROL

-
-
-
-

FLEXIBLE APPLICATION

-
-
-
-

TRUSTED RELIABILITY

-
-
-
-

PRODUCT PARAMETER

Max. PV array power[W]

Max. open circuit voltage[V]

Max. input current per string[A]

Max. short circuit current per string[A]

MPPT voltage range[V]

Start operating voltage[V]

Max. charge/discharge power [W]